


CONCRETE FOOTPATH

100mm CONCRETE PAVEMENT C40 AIR ENTRAINED OR C50 NO AIR ENTRAINED (EXPOSURE CLASS XF4) TO NRA CL 1106 ON
150mm UNBOUND GRANULAR SUB-BASE TYPE B TO CLAUSE 804 AND CLAUSE 808 NOTE 1 [MIN CBR 30%] ON
JOINTS TO BE FORMED WITH TWO LAYERS OF BITUMINOUS FELT FOR FULL SLAB DEPTH AT 3m CENTRES (JOINTS TO COINCIDE WITH JOINTS IN THE KERB AND POSITIONED AT CORNERS ETC LIABLE TO CRACKING)
FINISH BY FLOATING WITH WOODEN TROWEL WHILE STILL GREEN THEN LIGHTLY BRUSHED WITH A BASS BROOM TO PRODUCE SLIGHT ROUGHNESS.

ROAD CONSTRUCTION

65mm OF DENSE ASPHALT CONCRETE SURFACE COURSE: AC 6 DENSE SURF 70/100 REC TO CLAUSE 909 (NRA) ON
75mm OF DENSE BITUMEN MACADAM BINDER COURSE: AC 20 DENSE BIN 40/60 (20mm AGGREGATE) TO CLAUSE 906 ON
150mm OF GRANULAR SUB-BASE TO CLAUSE 804 (TYPE B) WITH BLUNDED SURFACE ON
450mm CLASS 6F2 CAPPING STONE

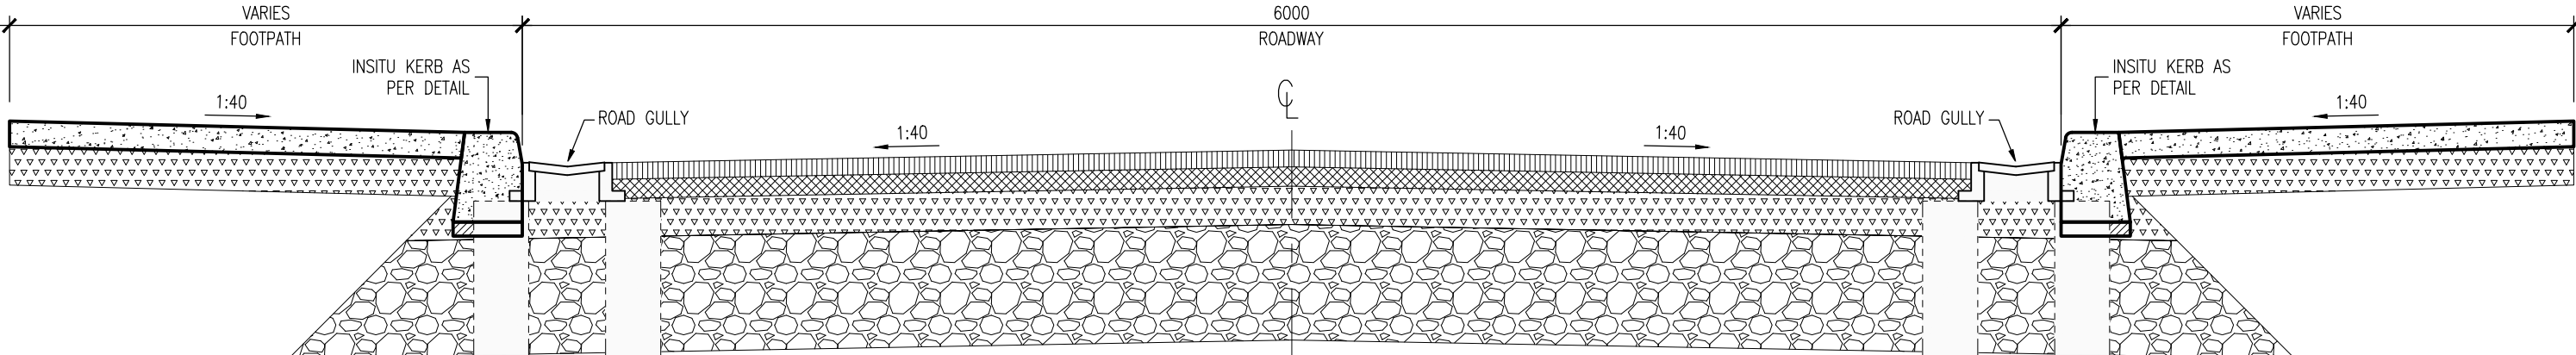


TYPICAL SECTION THROUGH ACCESS ROAD/RAMP
SCALE 1:25

CONCRETE FOOTPATH

100mm CONCRETE PAVEMENT C40 AIR ENTRAINED OR C50 NO AIR ENTRAINED (EXPOSURE CLASS XF4) TO NRA CL 1106 ON
150mm UNBOUND GRANULAR SUB-BASE TYPE B TO CLAUSE 804 AND CLAUSE 808 NOTE 1 [MIN CBR 30%] ON
JOINTS TO BE FORMED WITH TWO LAYERS OF BITUMINOUS FELT FOR FULL SLAB DEPTH AT 3m CENTRES (JOINTS TO COINCIDE WITH JOINTS IN THE KERB AND POSITIONED AT CORNERS ETC LIABLE TO CRACKING)
FINISH BY FLOATING WITH WOODEN TROWEL WHILE STILL GREEN THEN LIGHTLY BRUSHED WITH A BASS BROOM TO PRODUCE SLIGHT ROUGHNESS.

ROAD CONSTRUCTION


65mm OF DENSE ASPHALT CONCRETE SURFACE COURSE: AC 6 DENSE SURF 70/100 REC TO CLAUSE 909 (NRA) ON
75mm OF DENSE BITUMEN MACADAM BINDER COURSE: AC 20 DENSE BIN 40/60 (20mm AGGREGATE) TO CLAUSE 906 ON
150mm OF GRANULAR SUB-BASE TO CLAUSE 804 (TYPE B) WITH BLUNDED SURFACE ON
450mm CLASS 6F2 CAPPING STONE

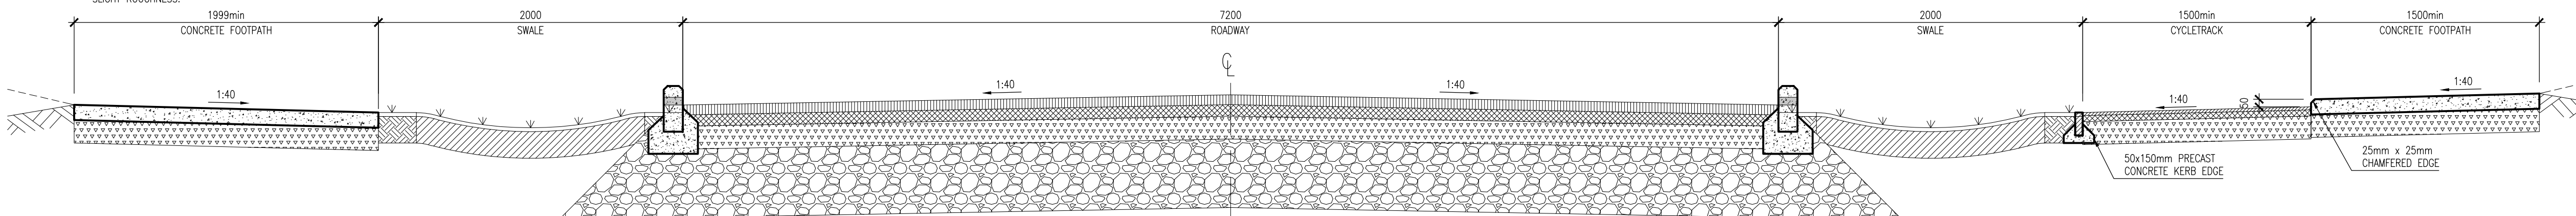


TYPICAL SECTION THROUGH LINK ROAD
SCALE 1:25

BITUMINOUS CYCLEWAY


60mm BITUMINOUS SURFACE COURSE : AC10 DENSE SURF (10mm AGG)
SINGLE LAYER ON
150mm SUB-BASE TO CL 804 (NRA) CRUSHED ROCK LAID TO FALL,
COMPACTED & BLUNDED WITH QUARRY SCREENINGS

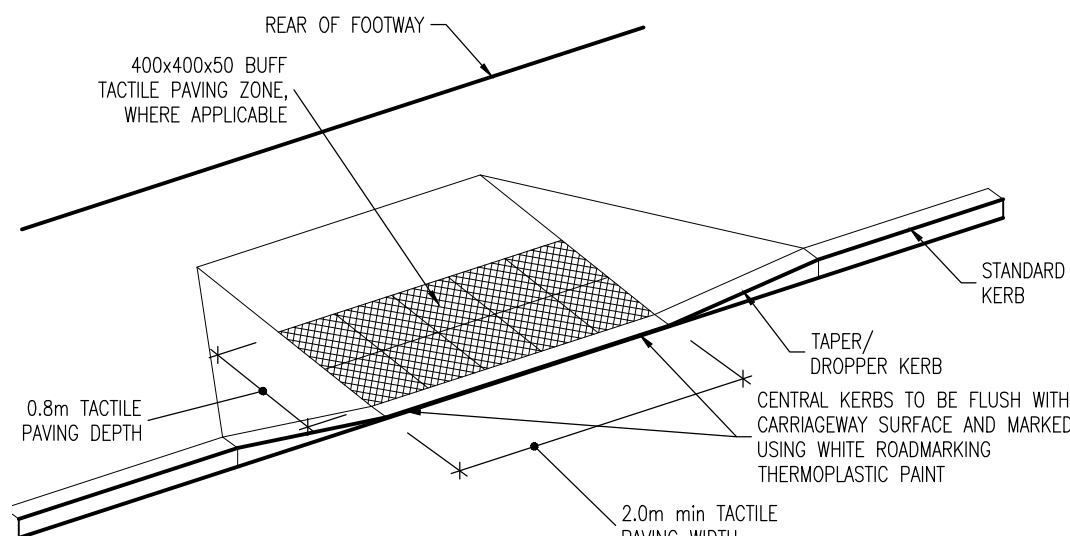


UNCONTROLLED DISHED
CROSSING WITH TACTILE PAVING
SCALE 1:50

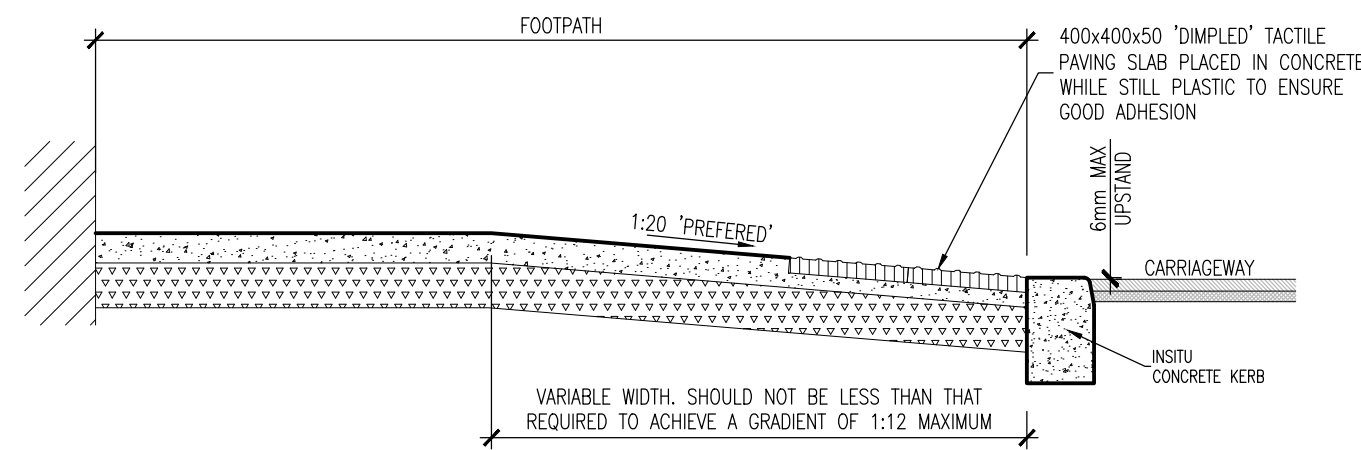


TYPICAL SECTION THROUGH DISHED CROSSING
SCALE 1:25



TYPICAL STANDARD PAVING CONSTRUCTION
IN PEDESTRIAN ONLY AREAS
SCALE 1:25



TYPICAL STANDARD PAVING CONSTRUCTION
IN TRAFFICKED AREAS
SCALE 1:25

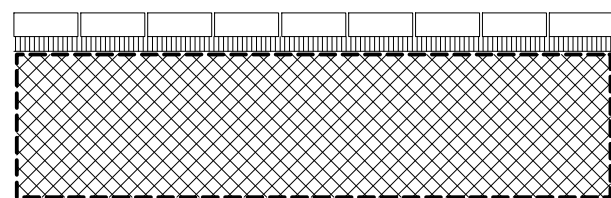


TYPICAL PERMEABLE PAVING CONSTRUCTION
IN PEDESTRIAN ONLY AREAS
SCALE 1:25

NOTES :

1. EDGES OF EXISTING CARRIAGEWAY TO BE CUT BACK BY 0.5m WITH A ROTARY SAW TO FORM A VERTICAL FACE AND PRIMED IN ACCORDANCE WITH CLAUSE 920 (NOTE 1).

2. WHERE THE BASE COURSE IS TO BE LAID IN TWO LAYERS, THE UPPER LAYER OF BASE COURSE SHOULD BE STEPPED INTO THE EXISTING PAVEMENT BY 1.0m MIN WITH THE BINDER COURSE AND SURFACE COURSE TO BE EACH STEPPED IN A FURTHER 1.0m MIN RESPECTIVELY.

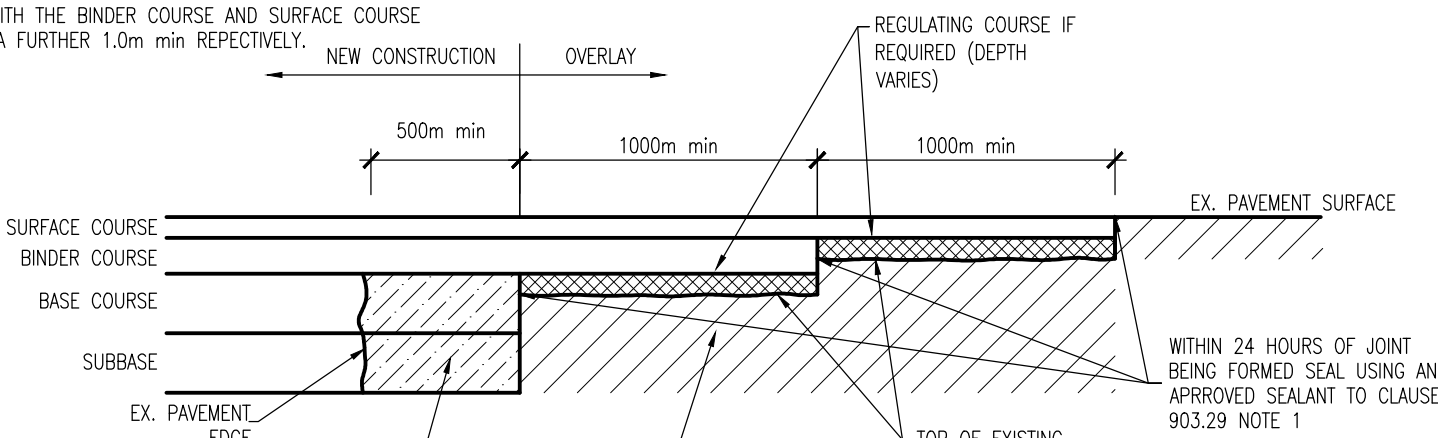

TRANSVERSE JOINT
SCALE 1:25


NOTE :

ALL FACES OF COLD UPSTANDING EDGES SHALL BE TREATED TO CLAUSE 903.26 NOTE 1

NOTES :

1. EDGES OF EXISTING CARRIAGEWAY TO BE CUT BACK BY 0.5m WITH A ROTARY SAW TO FORM A VERTICAL FACE AND PRIMED IN ACCORDANCE WITH CLAUSE 920 (NOTE 1).

2. WHERE THE BASE COURSE IS TO BE LAID IN TWO LAYERS, THE UPPER LAYER OF BASE COURSE SHOULD BE STEPPED INTO THE EXISTING PAVEMENT BY 0.3m MIN WITH THE BINDER COURSE AND SURFACE COURSE TO BE EACH STEPPED IN A FURTHER 0.3m MIN RESPECTIVELY.

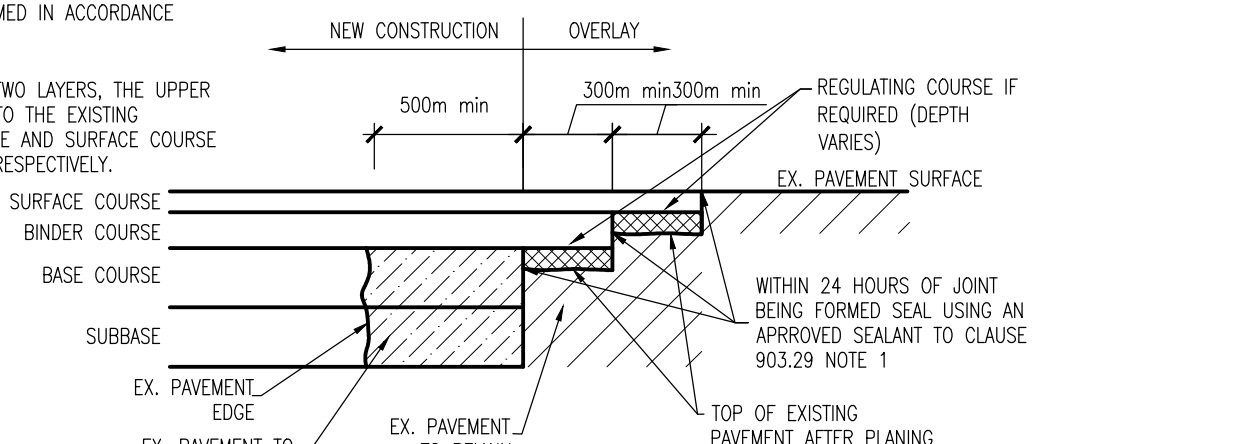


LONGITUDINAL JOINT DETAIL
SCALE 1:25


NOTE :

ALL FACES OF COLD UPSTANDING EDGES SHALL BE TREATED TO CLAUSE 903.26 NOTE 1


NOTES
1. ALL DIMENSIONS ARE IN MILLIMETERS
2. PRECAST KERBS SHALL BE LAID AND LEVELLED IN ACCORDANCE WITH B.S. 7263 - PART 2

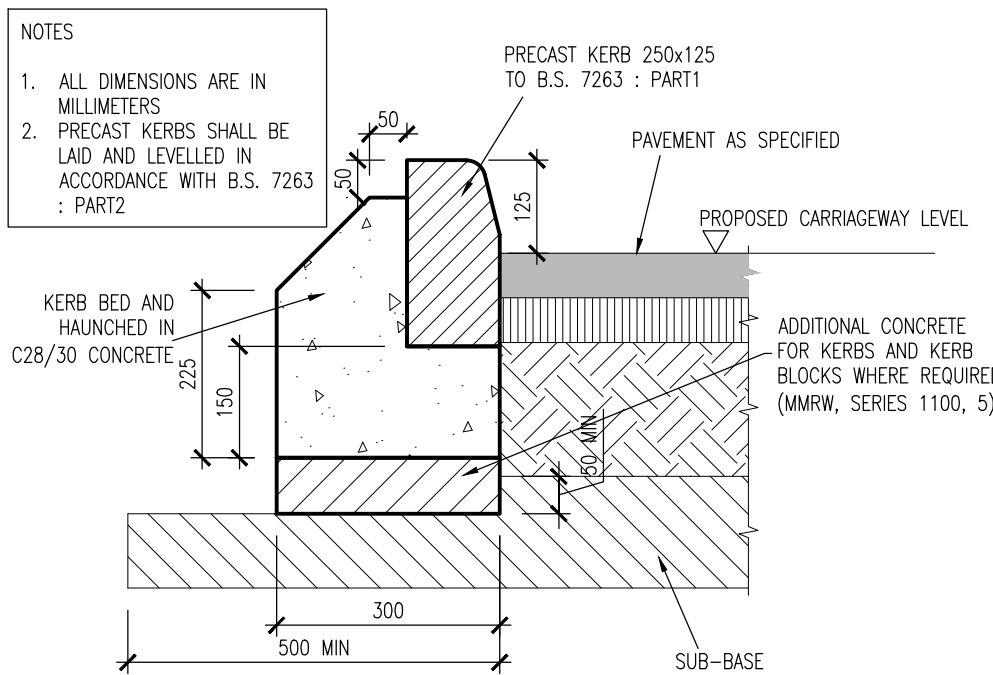

PRECAST KERB DETAIL
SCALE 1:10

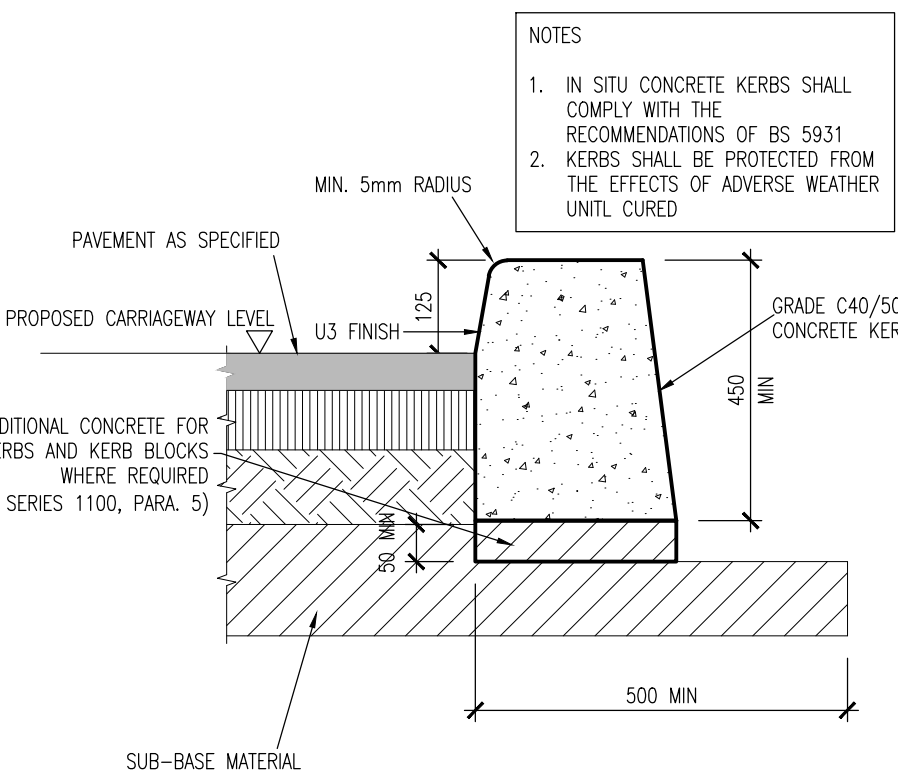


INSITU CONCRETE KERB DETAIL
SCALE 1:10

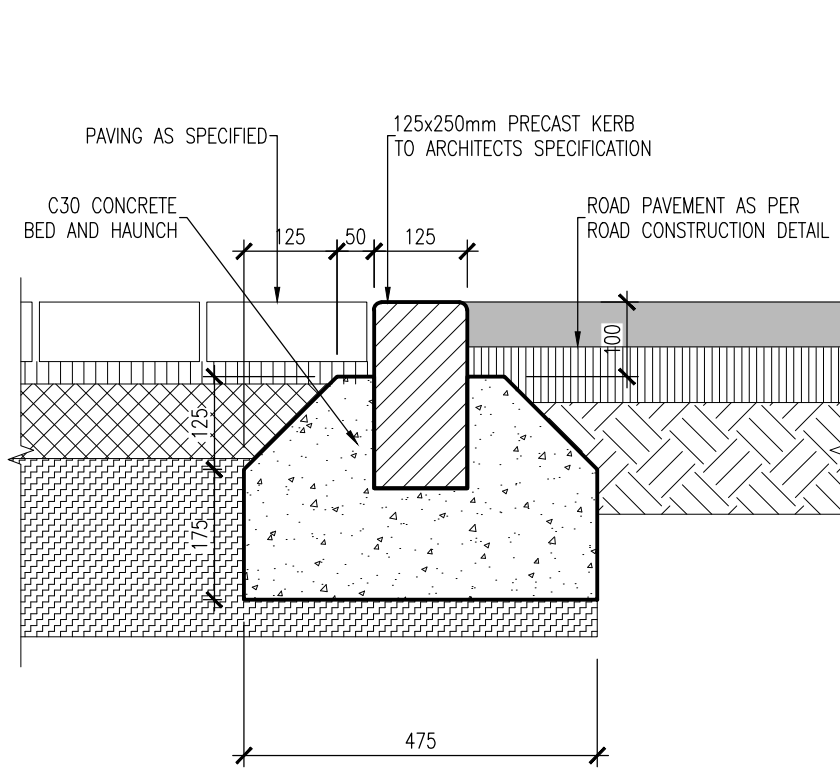

EDGE KERB DETAIL (DBM TO PAVING BLOCK)
SCALE 1:10

NOTES
1. IN SITU CONCRETE KERBS SHALL COMPLY WITH THE RECOMMENDATIONS OF BS 5931
2. KERBS SHALL BE PROTECTED FROM THE EFFECTS OF ADVERSE WEATHER UNTIL CURED

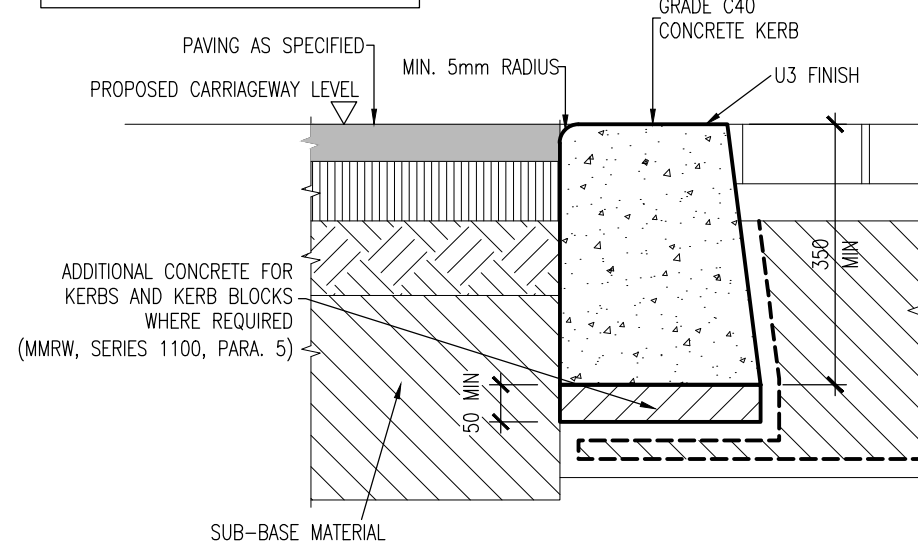

FLUSH KERB DETAIL
SCALE 1:10

NOTES

- POLYMER MODIFIED STONE MASTIC ASPHALT SURFACE COURSE SHALL COMPLY WITH THE REQUIREMENTS OF CLAUSE 942 OF THE NRA'S 'SPECIFICATION FOR ROAD WORKS' AND SHALL SATISFY THE REQUIREMENTS OF TABLE 9/2. IT SHALL BE LAID & COMPACTED IN ACCORDANCE WITH CLAUSE 901 & CLAUSE 702
- DENSE BITUMEN MACADAM BINDER COURSE SHALL COMPLY WITH THE REQUIREMENTS OF CLAUSE 906 OF THE NRA'S 'SPECIFICATION FOR ROAD WORKS' & SHALL SATISFY THE REQUIREMENTS OF TABLE 9/1. IT SHALL BE LAID & COMPACTED IN ACCORDANCE WITH CLAUSE 901 & CLAUSE 702.
- SUB-BASE MATERIAL SHALL COMPLY WITH CLAUSE 804 GRANULAR MATERIAL TYPE B OF NRA'S 'SPECIFICATION FOR ROAD WORKS' (SRW) & SHALL SATISFY THE REQUIREMENTS OF TABLE 8/4 & 8/2.
- SUB FORMATION & CAPPING MATERIAL SHALL COMPLY WITH CLAUSE 613 OF THE NRA'S 'SPECIFICATION FOR ROAD WORKS' & SHALL SATISFY THE REQUIREMENTS OF TABLE 6/1 & 6/2.
- STONE BLINDING WITH 2-6.3mm AGGREGATE SHALL MEET THE FOLLOWING GRADINGS, IN ACCORDANCE WITH IS EN 13242

BS SIEVE SIZE (mm)	% BY MASS PASSING
14	100
10	98-100
6.3	80-99
2.0	0-20
1.0	0-5
- CRUSHED STONE WITH 4-20mm AGGREGATE SHALL MEET THE FOLLOWING GRADINGS, IN ACCORDANCE WITH IS EN 13242

BS SIEVE SIZE (mm)	% BY MASS PASSING
40	100
31.5	98-100
20	90-99
10	25-70
4	0-15
5	0-5
- ANY ROADS PROPOSED TO BE USED FOR CONSTRUCTION TRAFFIC ARE TO HAVE INCREASED DEPTH OF SUB-BASE FOR THE DURATION OF CONSTRUCTION IN ACCORDANCE WITH DBFL SPECIFICATIONS.
- ALL WORKS SHALL BE COMPLETED IN ACCORDANCE WITH THE REQUIREMENTS OF THE LOCAL AUTHORITY.
- ALL GEORIDS TO BE LAID IN ACCORDANCE WITH MANUFACTURERS SPECIFICATIONS.
- ALL FILLING BELOW CAPPING LAYER (IE SUB-FORMATION) TO BE GRANULAR FILL MATERIAL CLASS 1C COARSE GRANULAR MATERIAL IN ACCORDANCE WITH THE SPECIFICATION FOR ROADWORKS, NRA
- ALL ROAD GULLIES IN ROADWAYS TO BE NON-LOCKABLE

PP4	09/10/19	PLANNING (ABP)	SM	GD	
PP3	13/09/19	ISSUED TO IRISH WATER	SM	GD	
PP2	29/04/19	PRE-PLANNING MTG (ABP)	SM	GD	
PP1	20/11/18	PRE-PLANNING TO SDC	PTC	GD	
Rev	Date	Description	By	Chk	

PLANNING

gdcl
CONSULTING ENGINEERS

Scope House,
Parrystown,
Dublin D12 K8PP
www.gdalyconsulting.com

75 Shelton Street,
Covent Garden,
London WC2H 9JQ

PROJECT
Cookstown Cross, Fourth Avenue
Cookstown Industrial Estate

CLIENT
Steelworks Property
Developments Limited

DRAWING TITLE
Typical Civil Details Sheet 1

dm. by: PTC	date: JUL 16	scale: 1:500
drawing size: A1	chk: TM	app: GD
job no: P-1606	drg. no: P-1606-C-103	rev: PP4